
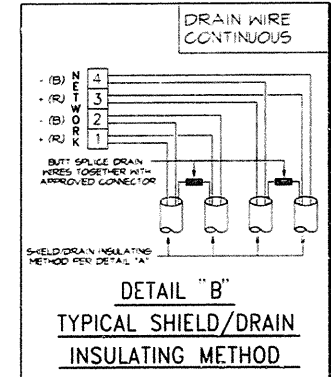


FILE NAME: D:\PROJECTS\ALARM\ALARM-400-1.dwg  
 DATE: 8/17/1999 BY: M. J. J.

LEGEND	WIRING	NOTES
XNET-A X-NETWORK "A" CIRCUITS XNET-B X-NETWORK "B" CIRCUITS XNET-C X-NETWORK "C" CIRCUITS XNET-D X-NETWORK "D" CIRCUITS LL1 LOW LEVEL CHANNEL 1 RISER (PAGE LEFT) LL2 LOW LEVEL CHANNEL 2 RISER (PAGE RIGHT) LL3 LOW LEVEL TELEPHONE RISER (TEL) HL1 HIGH LEVEL CHANNEL 1 HL2 HIGH LEVEL CHANNEL 2 ALD ANALOG LOOP DRIVER (L-4) COM CONVENTIONAL SIGNAL MODULE (S-4) DASHED LINE INDICATE WORK TO BE DONE DASHED LINE WITH DIAGONAL HATCH INDICATE EXISTING TO BE REMOVED DASHED LINE WITH DIAGONAL HATCH AND "X" INDICATE EXISTING TO BE RELOCATED	1. ALL AC POWER WIRING SHALL BE #10 AWG XHHW-2 (WHITE & BLACK). 2. AMPLIFIER BATTERY WIRING SHALL BE #10 AWG XHHW-2 (RED & BLACK). 3. HIGH LEVEL AUDIO, SPEAKER CONTROL & SOLID STATE CIRCUITS SHALL BE #14 AWG UNSHIELDED TEFELON. 4. LOW LEVEL AUDIO NETWORK, ALD, STROBE, TELEPHONE CIRCUITS SHALL BE #14 AWG UNSHIELDED TEFELON. 5. ALL WIRING DEVICES, TERMINALS, CONNECTORS, ETC. SHALL BE UL LISTED / MEA APPROVED FOR THE TYPE WIRE USED. 6. ALL TERMINAL CONNECTORS FOR #10 AWG SHALL BE APPROVED FOR SOLID WIRE CONNECTION.	1) SYSTEM SHALL BE INSTALLED IN ACCORDANCE WITH SIEMENS-CERBERUS DIVISION SPECIFICATIONS, APPLICABLE CODES & THE CONTRACT DOCUMENTS, DISCREPANCIES, CONFLICTS AND OMISSIONS FOUND ON ANY DOCUMENT, DRAWING, SPECIFICATION, ETC. SHALL BE REPORTED IMMEDIATELY TO THE SIEMENS-CERBERUS DIVISION PROJECT MANAGER. INSTALLING CONTRACTOR SHALL NOT PROCEED UNTIL CLARIFICATION AND RESOLUTION IS ISSUED IN WRITING BY SIEMENS-CERBERUS DIVISION PROJECT MANAGER. ALL WORK SHALL BE FULLY INSPECTED AND TESTED BY A CERTIFIED SYSTEMS TECHNICIAN DESIGNATED BY THE SIEMENS-CERBERUS DIVISION PROJECT MANAGER. SYSTEMS SHALL NOT BE POWERED UP PRIOR TO THIS POINT. 2) ALL CONNECTIONS MADE DIRECTLY OR INDIRECTLY TO SIEMENS-CERBERUS DIVISION EQUIPMENT AND SYSTEMS SHALL BE IN ACCORDANCE WITH ALL SIEMENS-CERBERUS DIVISION DRAWINGS, SPECIFICATIONS, BULLETINS AND SPECIFICATIONS. EQUIPMENT, METHODS OR MATERIALS NOT LISTED AND APPROVED FOR USE WITH THIS EQUIPMENT BY SIEMENS-CERBERUS DIVISION SHALL NOT BE EMPLOYED. 3) CONTRACTOR SHALL PERFORM ALL WORK SHOWN ON SIEMENS-CERBERUS DIVISION DRAWINGS WHICH INCLUDES INTERNAL WIRING, REMOVAL, CHANGES & ADDITIONS AND EXTERNAL WIRING TERMINATIONS AS WELL AS CONFORMITY INSTALLATION. ALL WORK SHALL BE PERFORMED IN THE PRESENCE OF THE ENGINEER.

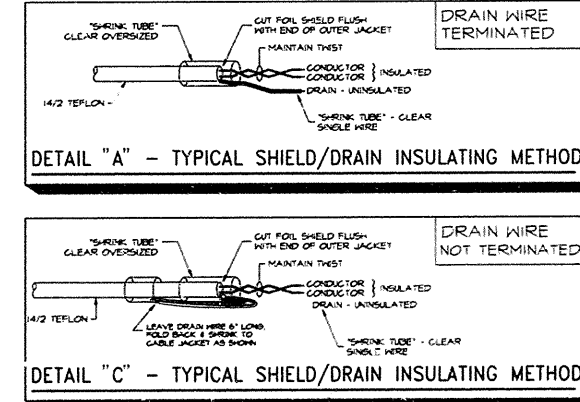

<b>SIEMENS</b> Siemens Building Technologies, Inc. DIRECT SALES ENGINEERING PROJECTS & SERVICE 5 LEWISTOWN BLVD., LEWISTOWN, PA 17033 Tel: (800) 834-3043	FIRE ALARM SYSTEM TRANSPOUNDER INSTALLATION 5 WORLD TRADE CENTER PLAZA LEVEL	DRAWING PREPARED FOR: DRAWN BY: N.P. SCALE: NONE DATE: 4/9/99 JOB NO: 861572 CHECKED BY: J.D. SHEET NO: MY-RV-NE-M2-1 1 OF 2
---	---	---